


KU-FC


Fixed to Ground Telescopic Glass Railing Systems

Designed completely with tempered glass, Kinetic systems do not contain any horizontal profiles, providing a continuous view. You can push down the top sliding frame at any time you want and enjoy the view. With high resistance to wind loads, other physical factors and aesthetic integrity, it ensures beautiful vistas in your spaces. Because the Kinetic FC is fixed to the ground, it provides high wind resistance and extra safety.

System Open

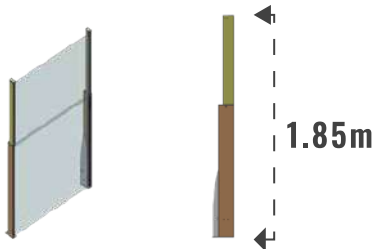

System Closed

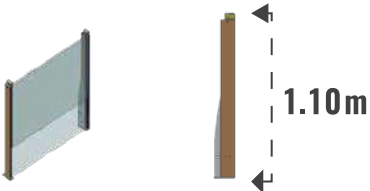

Technical Info

Max. Width

Max. Height

Operation

Glazing

: 1.60m

: 1.85m

: Semi-Automatic

: Bottom &Top Telescopic Glass
6mm Tempered / Clear

Material

Standard

Colors

: AA 6063-T6

: RAL 9005 (Black)

: RAL 9006 (White aluminum)

: RAL 9010 (White)

: RAL 1019 (Beige)

Optional:

Bottom Fixed Glass

5+1.52PVB+5 T. Laminated Glass

Can be produced in custom colors.

Top Telescopic Glass 6mm tempered


*Feet must be fixed to the concrete or steel

KU-FB


Telescopic Telescopic Glass Railing w/ Planter (Portative)

Kinetic FB systems are designed portable with an integrated planter. The planter bears the load, obtaining resistance against the wind*. Kinetic FB systems can cater to a wide range of project portfolios such as residential, hotels, shopping centers, caferestaurants with a flexibility of plan provided by a portable design advantage and a landscape contribution by the planter that is integrated into the design.

System Open

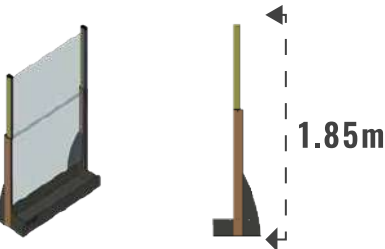

System Closed

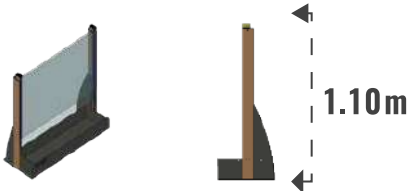

Technical Info

Max. Width

Max. Height

Operation

Glazing

: 1.50m

: 1.85m

: Semi-Automatic

: Bottom &Top Telescopic Glass
6mm Tempered / Clear

Planter*

Standard

Colors

: 15cm x 35 cm x **

: RAL 9005 (Black)

: RAL 9006 (White aluminum)

: RAL 9010 (White)

: RAL 1019 (Beige)

Optional:

Bottom Fixed Glass

5+1.52PVB+5 T. Laminated Glass

Can be produced in custom colors.

Top Telescopic Glass 6mm tempered

* The content of the planter is not provided by Libart. For safe use, the planter should be filled with 7 cm gravel, 7 cm wet soil (Approximately 80 kg).

** The internal width of the planter is 10 cm shorter than the module width.

